

Antenna Delete Plate and optional amplified AM/FM antenna installation instructions:

Step 1. Unscrew the old antenna. Save the screws and the factory gasket as they will be reused.



Step 2. Take out the drivers side interior "A" pillar cover. Remove the door trim (kick panel). Also, peel back the floor carpet.



Step 3. Remove the radio and unhook the antenna from the back of the radio. Pull the cable back out the "A" pillar.



Step 4: Using the saved fasteners and gasket, install the block off plate on the A-pillar next. If you did not buy the optional antenna, reinstall A-pillar and kick panel and you're done with the plate install. If you purchased the optional amplified AM/FM antenna go to step 5.




Step 5. The amplified antenna is best mounted next to the headliner above the rear view mirror. Clean the inside surface of the window to remove dirt and oil. Mount the new antenna above the mirror by removing the adhesive backing. Make sure the wires are tight against the headliner. They will be pulled through the headliner in step 6 and be totally hidden.




Step 6: Remove map light assembly by removing the light lens and removing the 2 Phillips screws. Pull the antenna wires through the headliner's map light hole. There will be a ground wire, a power wire, and an antenna wire.

Step 7: Ground the antenna (using the metal braided ground wire) to the black wire from the lights and replace the lights (see arrow). Optionally you may ground directly to the roof's sheet metal using the map light mounting screws.

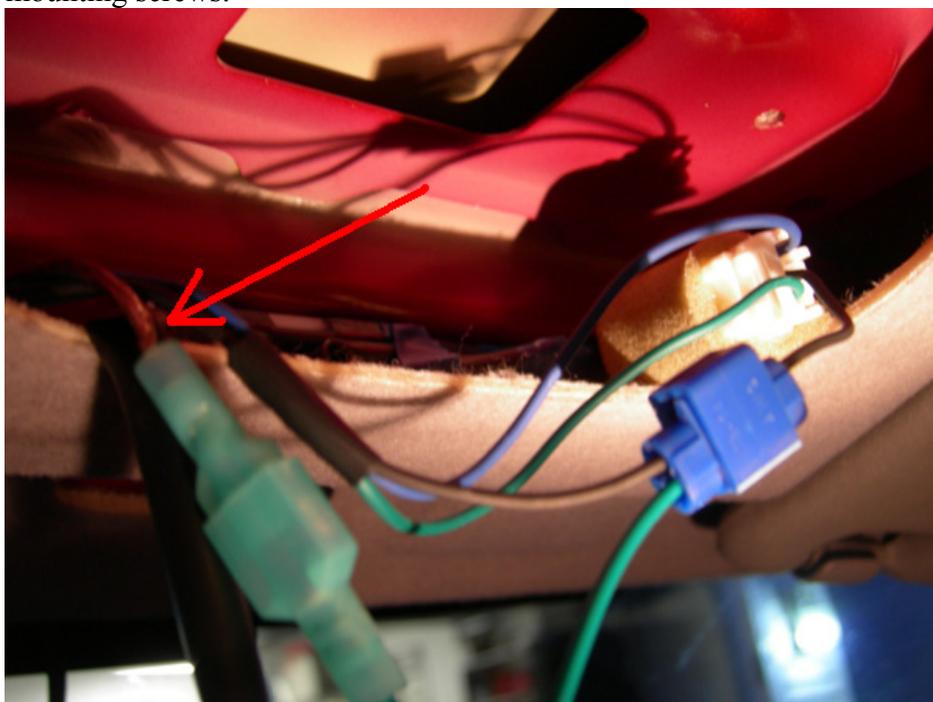

Step 8: Run the power wire and antenna wire to the "A" pillar via the headliner and down under the dash. Run it over to the radio hole where you will tap the power and plug in the antenna.

Step 9: Add power to the antenna by clipping the antenna power wire onto the accessory wire on the radio.

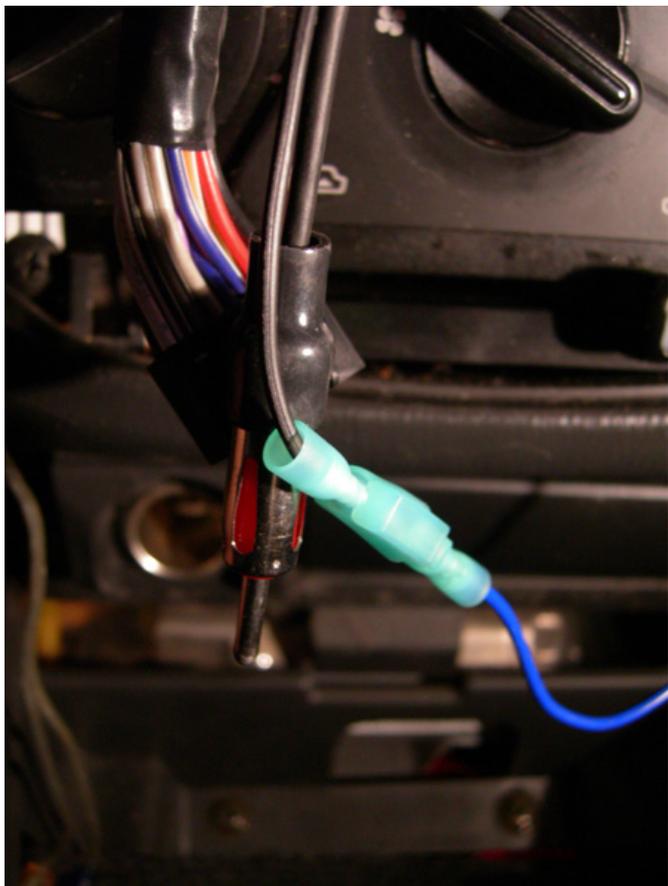

Step 10: Plug in the antenna to the back of the receiver. To test the antenna's functionality, turn the car to the on position and verify the red LED on the amplified antenna lights up when the radio is on. If it does not turn on recheck your ground and power taps. Reinstall the radio trim, kick panel, map light, and A-pillar trim. You're done. Enjoy your new stealth antenna without losing radio reception.

